



WeatherTek®

Butyl Flashing

PART OF THE WEATHERTEK SYSTEM



Reliable Moisture Protection

WeatherTek Butyl Flashing is a self-adhered membrane designed to provide effective waterproofing for windows, doors, and other key areas. Built for durability and ease of use, it protects against water and air infiltration, ensuring building integrity.

Product Description

WeatherTek Butyl Flashing consists of a robust polyolefin facer integrated with a high-tack butyl rubber adhesive, ensuring outstanding bonding strength and adaptability. Available in various widths and featuring a dry edge to easily remove the release liner, this product facilitates efficient installation and creates a watertight seal around windows, doors, and other essential transitions.



Composition

Polyolefin facer with butyl rubber adhesive



Roll Length

75 ft



Roll Widths

4 in., 6 in., 9 in., 12 in.



Unique Feature

Dry edge liner for streamlined application

Key Features

- Strong adhesion to wood, metal, vinyl, and more for a lasting waterproof seal.
- Seals around fasteners to stop water entry, even after installation.
- 9 Month UV-resistant lasting performance in sunlight.
- Peel-and-stick design with dry edge for quick, tool-free installation.
- Eco-friendly: no asphalts, VOCs, or solvents for safer use.
- Meets AAMA 711 standards for self-adhered flashing.



PART OF THE WEATHERTEK SYSTEM

WeatherTek Butyl Flashing is eligible for a 20-Year WeatherTek System Warranty when installed with approved WeatherTek components.

Visit [weathertekbp.com](https://www.weathertekbp.com) for details



WeatherTek® Butyl Flashing

PART OF THE WEATHERTEK SYSTEM



Usage and Applications

WeatherTek Butyl Flashing is specifically designed to safeguard areas susceptible to moisture intrusion. It is ideally suited for:

- Window and door openings (sills, jambs, headers, thresholds)
- Deck-to-wall intersections
- Foundation sill plates
- Roof-to-wall transitions
- Inside and outside corners of sheathing
- Other non-roof detail areas requiring effective moisture management

This product establishes a reliable drainage plane, channeling water away from vulnerable zones to prevent damage and reduce repair costs.

Quick Install Guide

- A. WeatherTek Butyl, WeatherTek AW Butyl, WeatherTek Flex Butyl
- B. Weathertek Sealant


STEP BY STEP

1. **Prep the Sill** – Cut flashing 12" longer than the sill. Stick it down, extending 6" up the side jambs.
2. **Install Window/Door** – Apply sealant to the head and jamb sides of the nailing flange (not the bottom). Secure per manufacturer instructions.
3. **Seal the Sides** – Apply flashing over jamb side nailing flanges, with J-Roller or Straight Edge, extending 3" above and below the opening.
4. **Head Flashing** – Cut the building wrap at 45° angles to integrate the head flashing. Overlap jamb side flashing by 3-4". Press firmly. Seal 45° angle cuts with seam tape.
5. **Final Check** – Smooth out air pockets with J-Roller or Straight Edge to ensure all edges are sealed.

Technical Data

WeatherTek Butyl Flashing undergoes stringent testing to ensure compliance with industry standards for strength, adhesion, and weather resistance:

Nail Sealability (AAMA 711-22 Sec 5.2)	Pass
Breaking Strength (AAMA 711-22 Sec 5.1)	52.7 lbs/in
Elevated Temperature Exposure (AAMA 711-22 Sec 5.5)	Pass Level 3 (176F)
UV Exposure	9 Months
Application Temperature	30F to 150F
Service Temperature	-40F to 180F

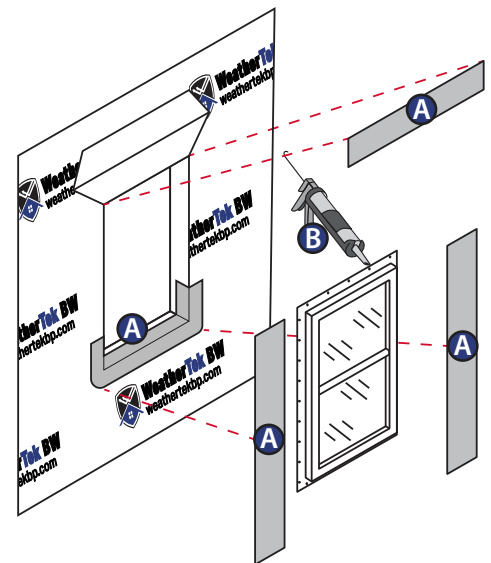

Get Started Today

Visit weathertekbp.com to learn more about how WeatherTek can revolutionize your building projects. Contact us for samples or specifications.



PART OF THE WEATHERTEK SYSTEM

WeatherTek Butyl Flashing is eligible for a 20-Year WeatherTek System Warranty when installed with approved WeatherTek components.

Visit weathertekbp.com for details