




**WeatherTek**  
Building Products, LLC

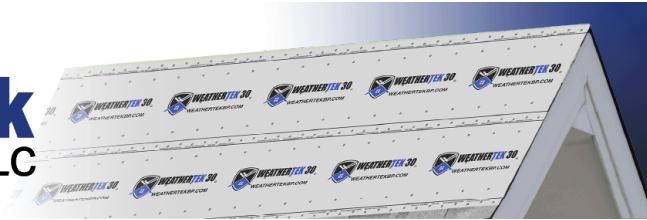

**WEATHERTEK** is an engineered synthetic composite consisting of four layers designed for sloped roof deck applications as a replacement for asphalt felt. Featuring a non-woven top layer providing excellent walkability, and a durable woven bottom layer with anti-skid coating to hold the material in place during installation.

<b>SPECIFICATIONS</b>	<b>WeatherTek</b>			
	<b>PRO</b>	<b>20</b>	<b>30</b>	<b>TM</b>
<b>Roll Size</b>	48" x 250'			
** Also available in 5 square rolls: 48" x 125'				
<b>Weight Per 10 Square (1000 ft<sup>2</sup>)</b>	18 Lbs	21 Lbs	25 Lbs	39 Lbs
<b>Rolls / Pallet</b>	72	64	42	36
<b>Thickness ASTM D-1777</b>	6 mils	7 mils	9 mils	12 mils
<b>Tensile Test ASTM D-882 (lb/in)</b>	MD = 85 CD = 54	MD = 87 CD = 62	MD = 120 CD = 80	MD = 130 CD = 87
<b>Tear Test ASTM D-5733 (lbf)</b>	MD = 35; CD = 36	MD = 35; CD = 38	MD = 42; CD = 45	MD = 68; CD = 79
<b>WVTR ASTM D-4869</b>	PASS	PASS	PASS	PASS
<b>PLIABILITY ASTM D-226</b>	PASS	PASS	PASS	PASS
<b>CODE COMPLIANCE AC-188 &amp; ASTM D8257</b>	PASS	PASS	PASS	PASS
<b>FIRE CLASSIFICATION (ASTM E108)</b>	PASS	PASS	PASS	PASS
<b>WARRANTY (Years)</b>	20	25	30	50
<b>CUSTOM LOGO AVAILABLE</b>				

## **BENEFITS**

### **Excellent Tear Resistance:**

Designed to withstand job site conditions and not tear during installation.

### **Weather Resistance:**

Withstands weather as a secondary moisture barrier.

### **Ease of Installation:**

Light-weight and rolls out easily without wrinkling.

### **Faster Installation:**

33% more coverage vs. 36" felt.  
14% more coverage vs. 42" synthetics.

### **Code Compliant:**

Meets or exceeds performance criteria for ASTM D226

Meets or exceeds performance criteria for ASTM D4869 Intertek CCRR-0519, FBC Approval – FL#45958

### **UV Resistance:**

Up to 180 UV exposure



**CCRR-0519 FL#45958**